

Double Jar Down Adaptor

The Double Jar Down Adaptor can be fitted to a Full Radial Contact (FRC) and Heavy-Duty FRC (HD-FRC) Pulling Tool to recover an external fishing neck.

Unlike the FRC Pulling Tool which has a fixed 'jar down to release' mode, the Double Jar Down Adaptor enables repetitive jarring down as needed to latch the fish without the inherent risk of prematurely shearing the 'jar down to release' pin.

If the fish cannot be recovered, the upper pin in the Double Jar Down Adaptor will shear thus allowing subsequent downward jarring to release the Pulling Tool.

APPLICATIONS


- Gas lift work
- High deviation well intervention

FEATURES AND BENEFITS

- Can be used to retrofit Peak's FRC Pulling Tool
- Reduces toolbox inventory
- Simple shear pin to redress
- Reduced NPT due to elimination of premature shearing of pin

TECHNICAL INFORMATION

Nominal Tubing Size, in	Tool OD, in	Fits FRC Sizes, in	Overall Length, in
2 3/8	1.750	1.750	13.19
2 7/8	2.220	2.220	17.32
3 1/2	2.600	2.600	19.25
4 1/2	3.250	3.250	18.86

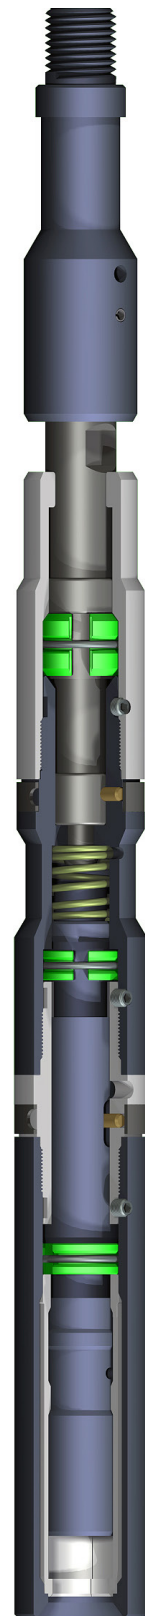

Product Code: Double Jar Down Adaptor / 233

info@peakwellsystems.com | peakwellsystems.com

© 2017 Peak Well Systems Pty Ltd. All rights reserved.

